



The ultra-economy RBAY17 high bay is offered in 3 sizes with field-adjustable wattage and CCT to give you 9 SKUs in 1.

Color: White

Weight: 7.9 lbs

Project:

Type:

Prepared By:

Date:

#### Driver Info

Type	Constant Current	Watts	260/220/160W
120V	2.40A/2.00A/1.65A	Color Temp	3500/4000/5000K
208V	1.40A/1.20A/0.95A	Color Accuracy	82-86 CRI
240V	1.20A/1.00A/0.85A	L70 Lifespan	100,000 Hours
277V	1.10A/0.80A/0.70A	Lumens	24,468-41,007 lm
Input Watts	153.9-260W	Efficacy	141.1-170.5 lm/W

#### LED Info

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
260W/220W/160W (factory default 260W)  
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

### Optical Field Adjustability:

Adjustable from standard to aisle lighting optics with a simple rotation of the lens. Choose between 90x90° or 45x110° to get the distribution.

### Compliance

#### UL Listed:

Suitable for damp locations

### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

### IP Rating:

IP20

### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-V4JPQ0

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Electrical

#### Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz:  
260W: 120V: 2.40A, 208V: 1.40A, 240V: 1.20A, 277V: 1.10A  
220W: 120V: 2.00A, 208V: 1.20A, 240V: 1.00A, 277V: 0.80A  
160W: 120V: 1.65A, 208V: 0.95A, 240V: 0.85A, 277V: 0.70A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

### Aux Power Supply:

Yes

### Dim to Off:

Yes

### Surge Protection:

L/N-PE: 6 kV, L-N: 6 kV

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

#### Maximum Ambient Temperature:

Suitable for use in up to 122°F (50°C)

#### Lens:

Polycarbonate lens

#### Reflector:

Polycarbonate

#### IK Rating:

IK08 Protected against 5 joules of impact. Equivalent to the impact of a 3.75 lbs. (1.7kg) mass dropped from 11.8" (300mm) above the impacted surface.

#### Housing:

Die-cast aluminum



## Technical Specifications (continued)

### Gaskets:

High-temperature silicone

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

## Installation

### Mounting:

Comes standard with V-hooks for chain mounting.


Accessories available for pendant and surface mounting (purchased separately).

## Other

### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

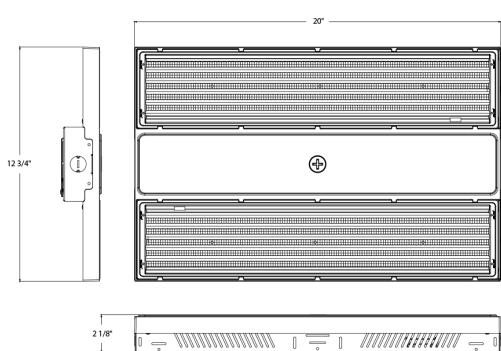

## Features

100,000-Hour LED lifespan

DLC Premium Listed

0-10V dimming, standard

5-Year, limited warranty

## Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Driver	Battery Backup
RBAY15	M	Blank = 3500/4000/5000K CCT Adjustable	Blank = V-Hook/Chain	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = None /E = Battery Backup

**S** = 130/100/80W  
**M** = 260/220/160W  
**L** = 400/320/260W