



Color: Bronze

Weight: 11.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current	Watts	200/180/160W
120V	1.63A/1.46A/1.30A	Color Temp	3000/4000/5000K
208V	0.94A/0.84A/0.75A	Color Accuracy	81-83 CRI
240V	0.85A/0.76A/0.68A	L70 Lifespan	100,000 Hours
277V	0.72A/0.68A/0.61A	Lumens	25,114-31,971 lm
Input Watts	155.9-202.6W	Efficacy	149.3-168.4 lm/W

Technical Specifications**Compliance****UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-Y72P8P (Outdoor Pole/Arm-Mounted Area and Roadway Luminaires)S-R9YLTM (Architectural Flood and Spot Luminaires)

Electrical**Driver:**

200W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 1.63A, 208V: 0.94A, 240V: 0.85A, 277V: 0.72A
 180W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 1.46A, 208V: 0.84A, 240V: 0.76A, 277V: 0.68A
 160W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 1.30A, 208V: 0.75A, 240V: 0.68A, 277V: 0.61A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

2.81% at 120V, 10.04% at 277V

Power Factor:

99.9% at 120V, 95.8% at 277V

Surge Protection:

6 kV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction**IES Classification:**

The Type III distribution is ideal for roadway, general parking and other area lighting applications where a larger pool of lighting is required. It is intended to be located near the side of the area, allowing the light to project outward and fill the area.

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Polycarbonate lens

Housing:

Die-cast aluminum housing, lens frame and mounting arm

Vibration Rating:

3G vibration rating per ANSI C136.31

Technical Specifications (continued)**EPA:**

1 Fixture: 0.60
2 Fixtures at 90°: 0.77
2 Fixtures at 180°: 1.19
3 Fixtures at 90°: 1.19
4 Fixtures at 90°: 1.19

EPA with Slipfitter & Adjustable Arm Mounting**Accessories (Sold Separately)**

1 Fixture: 0.79
2 Fixtures at 90°: 0.97
2 Fixtures at 180°: 1.59
3 Fixtures at 90°: 1.59
4 Fixtures at 90°: 1.59

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics**LEDs:**

Long-life, high-efficiency, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Installation**Mounting:**

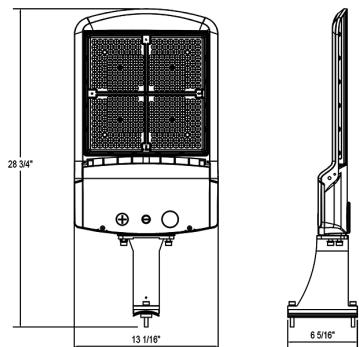

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole adapter plate included as a standard. Easy slide and lock to mount fixture with ease. Round pole diameter must be >4" to mount fixtures at 90° orientation.

Optical**BUG Rating:**

B4 U0 G4

Other**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions**Features**

0-10V Dimming, standard

100,000-hour LED lifespan

5-Year, limited warranty

Ordering Matrix

Family	Distribution	Wattage/Lumens	Mounting	Color Temp	Finish	Driver	Options
A17	-	3T	200				
4T = Type IV		70 = 70/60/50W	SF = Slipfitter (Factory installed SF available in 150W) ¹	Blank = 3000/4000/5000K CCT Adjustable	Blank = Bronze	Blank = 120-277V, 0-10V Dimming	Blank = No Option
5T = Type V		100 = 100/80/60W				/480 = 480V, 0-10V Dimming	/3PRS = 3-pin Receptacle and Shorting Cap
3T = Type III		150 = 150/120/100W	Blank = Universal Pole Mount				/7PRS = 7-pin Receptacle and Shorting Cap
		200 = 200/180/160W					/MVS = Microwave Motion Sensor
		300 = 300/240/200W					/LCBS = Lightcloud Blue w/PIR Sensor
		375 = 375/300/240W					/LCBS/MVS = Lightcloud Blue w/MVS Sensor
		480 = 480/400/320W					

¹ 150W Slipfitter Mount available on 150W only

Type II distribution available as special order.

Wall mount and roadway arm mount available as optional accessories.